


Standard SERVO (43g) SERIES

Standard SERVO 43g(ES3001) SPECIFICATIONS

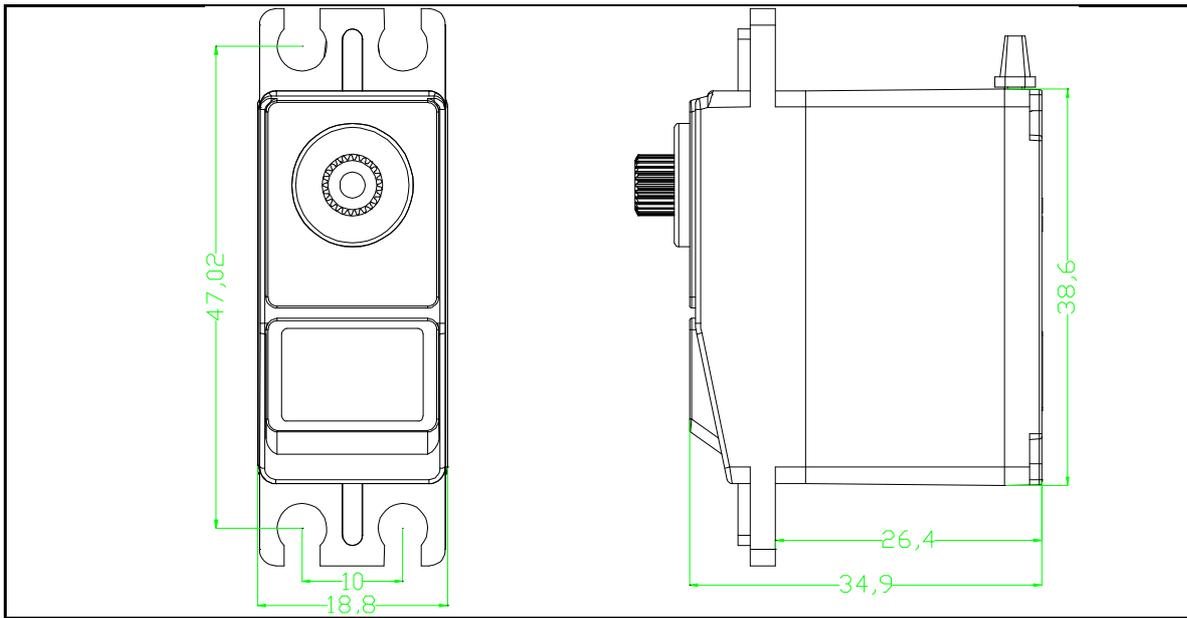

Operating Voltage:		4.8~6.0V
STD Direction:		Counter Clockwise / Pulse Traveling 1500 to 1900usec
Stall Torque:	4.8V	3.5Kgf.cm
Operating Speed:	4.8V	0.17 Sec/60° at no load
Stall Torque:	6.0V	4.8Kgf.cm
Operating Speed:	6.0V	0.14 Sec/60° at no load
Size:		38.6X18.8X34.9 mm
Weight:		37g
Plug Available		FUT ;JR
Other		Bearing,Analog

2011.11.8